


Amphenol Automotive

Amphenol-Tuchel Electronics GmbH

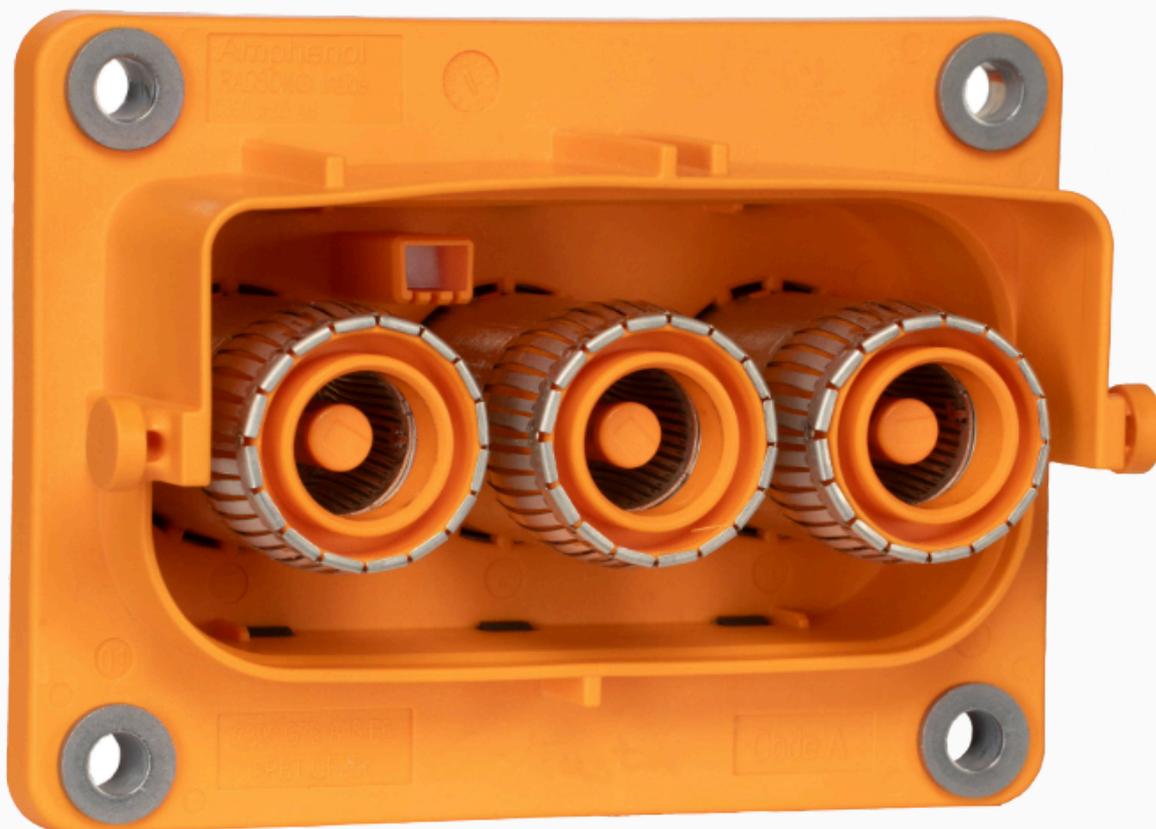

14mm 90° POWERSOK® -3SC Header

C390 3H06 XH00 400X



PRODUCT CHARACTERISTICS

Mating design	- Screwed to interface (4 x M5)
Terminal system	- 3 x Ø 14,0mm Cu-Pin - Silver plated - 2 x 1,2mm HVIL contacts - Silver plated
Termination technology	- 3 x M6 bolts
General features	- Metal shielded design for cable and interface - Tightness: IP6K7, IP6K9K - Header supplied as kit. Connection to customer application variable - Touch proof: IPxxB/ IPxxD

CONSTRUCTION

Housing material	PBT-GF 25 (V0)
Contact material	Cu (silver plated)
Busbars according to specification	
RFI/EMI protection	Radial metal shielding 360°
Temperature sensor	Optional

PERFORMANCE CHARACTERISTICS

Vibration class	ISO 16750-3 Test VII+IX
Mating force	<75N
Current profile	340A @ 80°C (with cable 70mm ²)
Voltage range	1000V
Temperature range	-40°C to +150°C

CONNECTOR INTERFACE

Ø 14,0mm RADSOK® contact system

Silver plated

Power contact pitch 28,8mm

HVIL contact pitch 2,5mm

DIMENSIONS

